

Center Core: 3 inches (7.6 cm) dia  
Mold used: #679, FireliteForms.com

**Splash! (P.1)**  
**(Slumped Bowl)**




**Fuse Firing**

Segment No.	Rate (degrees / hour)		Target Temp		Hold at Target (minutes)
	(F)	(C)	(F)	(C)	
1	400	204	1050	566	20
2	300	149	1465	796	10
3	Full	Full	950	510	60
4	200	93	800	427	10

**Slump Firing**

Segment No.	Rate (degrees / hour)		Target Temp		Hold at Target (minutes)
	(F)	(C)	(F)	(C)	
1	275	135	1050	566	20
2	200	93	1225	663	10
3	Full	Full	950	510	60
4	200	93	800	427	10
5	200	93	200	93	10

\*These schedules were designed for this project only and will not be appropriate for most others. See the web site article "A Simple Understanding of Firing" for more information.

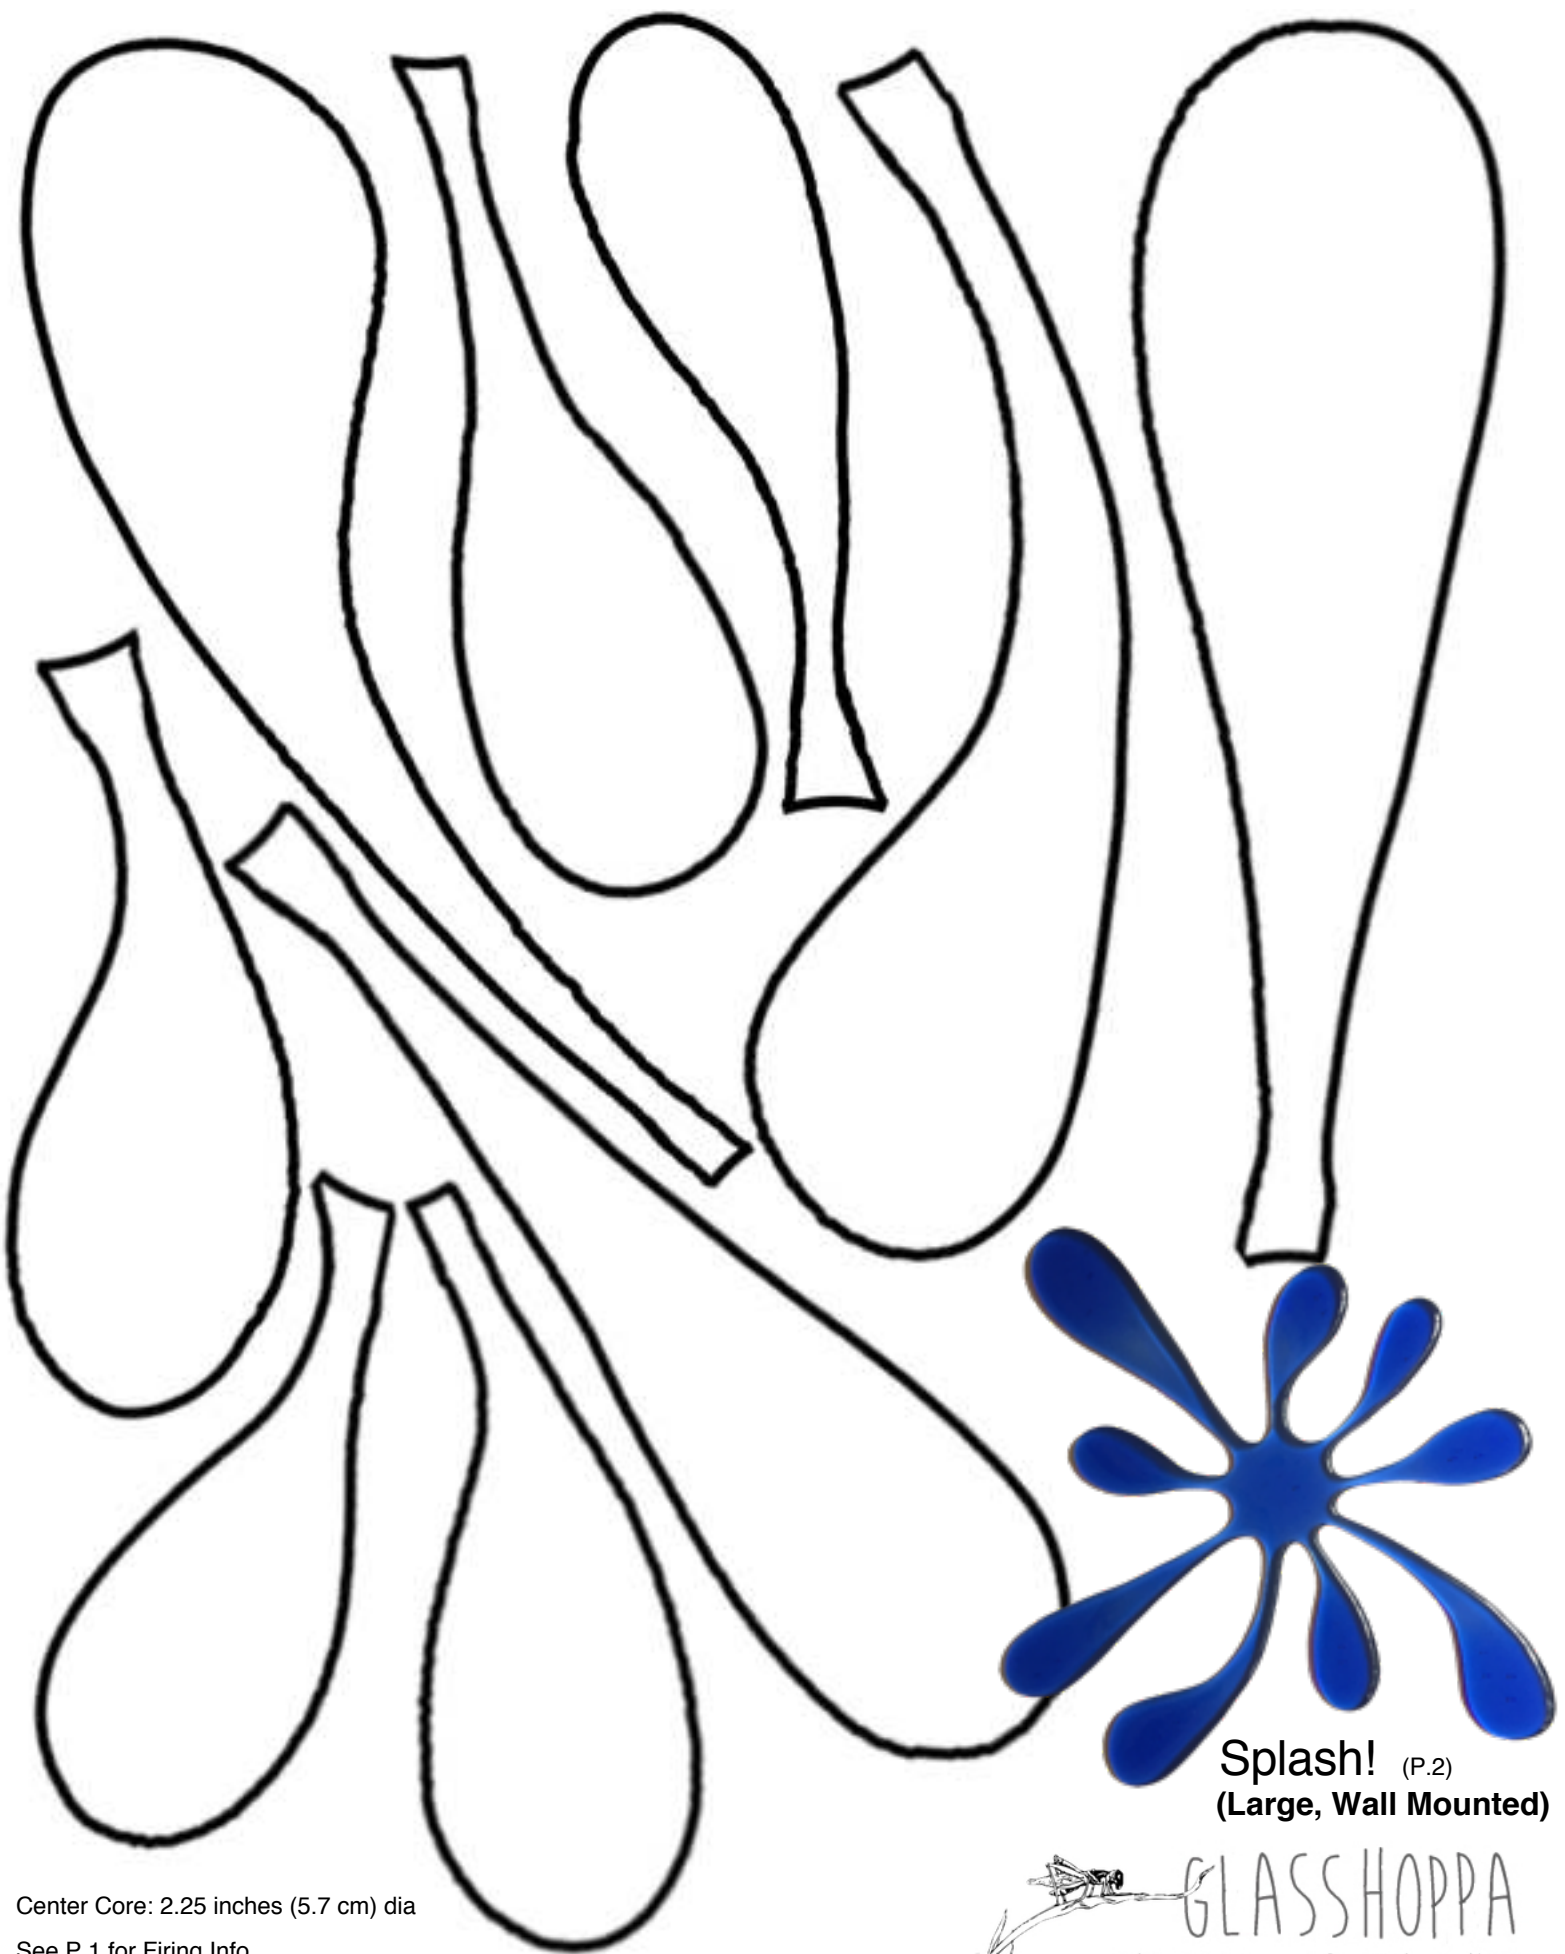

Center Core: 2.25 inches (5.7 cm) dia  
See P.1 for Firing Info


**Splash!** (P.2)  
**(Large, Wall Mounted)**



GLASSHOPPA  
GLASS ART & ARTFUL STUFF



**Splash!** (P.3)  
**(Small Wall Mounted)**

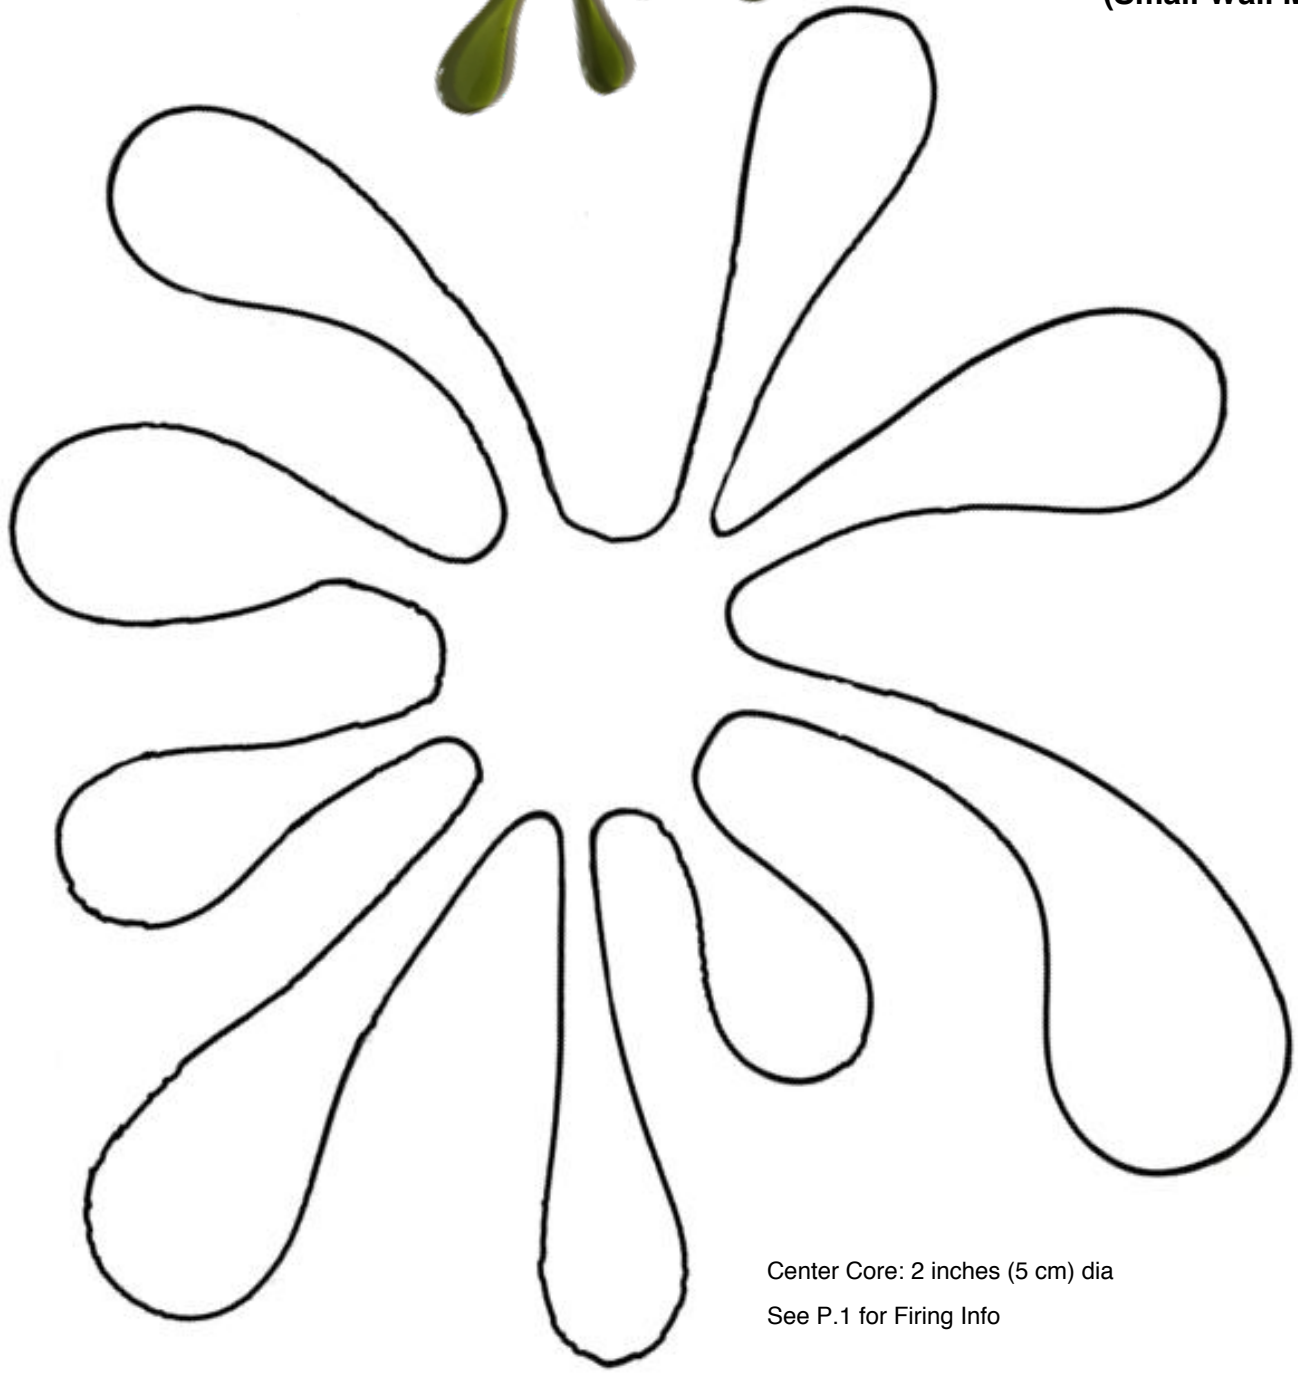

Center Core: 2 inches (5 cm) dia  
See P.1 for Firing Info